

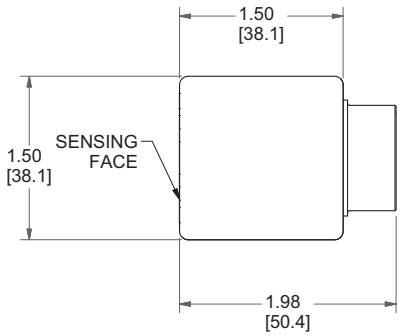


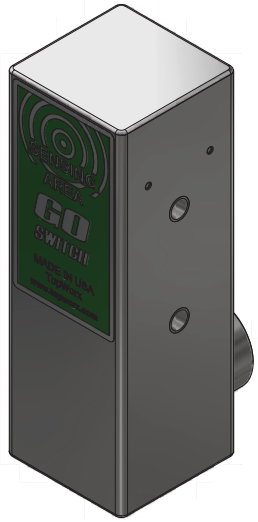

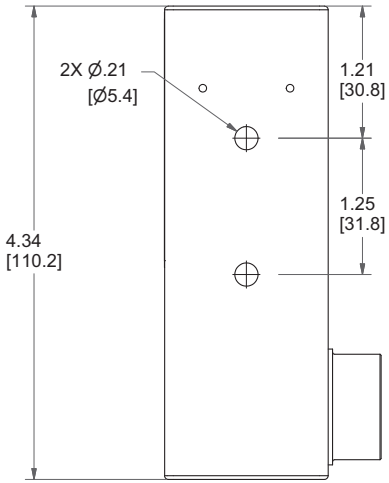

MODEL NUMBER

11-11123-A400000

PRODUCT LINE


GO™ Switch 10/20 Series

SPECIFICATIONS

Model	11 Model
Contact Form	SPDT (Form C)
Sensing Range	Standard approx. 3/8" side
Outlet Position	Behind sensing area
Enclosure Material	316L Stainless Steel Enclosure
Area Classification	UL Cl I, Div 1
Wiring Options	12ft PVC lead wire
Regional Certification	No regional certification
Custom Field	

WIRING DIAGRAM

PVC/PTFE LEADS – 4 WIRE
SPDT



NAMEPLATE

GO SWITCH
www.topworx.com

COUNTRY OF ORIGIN US

INDUSTRIAL CONTROL EQUIPMENT FOR HAZARDOUS LOCATIONS
CL I DIV 1, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G; CL III; TYPE 4X
ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE; 480VAC/240VDC MAX
STD. DUTY PILOT DUTY 120VAC; HEAVY DUTY PILOT DUTY 480VAC
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.

Model #: **Serial #:**

GO SWITCH

Current as of October 23, 2019 – Subject to change without notice.

TOPWORX™
3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com