











Accessories (Electrical Auxiliaries)

Type	Description	Connection diagram
FX... 	**Auxiliary Switch** · Front mounting · 2-pole · One front mounting module per circuit breaker	1NO1NC  2NO  2NC 
LX... 	**Auxiliary Switch** · Side mounting on the left · 2-pole · One side mounting module per circuit breaker	1NO1NC  2NO  2NC 
LA... 	**Any Trip Alarm Switch** · Operates in case of trip · Side mounting on the left · 2-pole · Set LA first in case of using LX together (MMS-63 can not accept LX and LA together) · For MMS-32 and MMS-63/100 products are separated.	1NO1NC  2NC 
LAM... 	**Magnetic Trip Alarm Switch** · Operates in case of short circuit accidents that is over 20 times of the rated current · Side mounting on the left · 2-pole · Set LAM first in case of using LX together	1NO1NC  2NO  2NC 


● Installation of auxiliaries

Be sure to turn off the main switch of MMS before any other action.




MMS-32S/H/HI


- To install FX remove the cover ① first.
- 2 each of LX can be installed together.
- Only one of auxiliaries among RU, RS and RUX can be mounted on the right side of MMS.
- Do not give trip signal to RS longer than 10 sec.
- Refer to the possible combination chart for the mounting of LX, LA and LAM on left side of MMS.

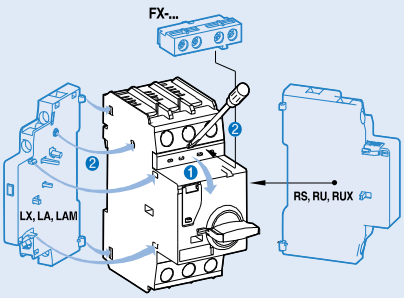

- Push the trip button before installation of LAM




- Remove the indicated part in the fig. before the additional installation of LX



Separation of auxiliaries from MMS

- be sure to turn off the main switch of MMS before the separation.
- push softly the separation button on the side of the auxiliary and pull it.



※Please make sure to choose proper LA before use because LA for MMS-32 and MMS-63/100 is different.