


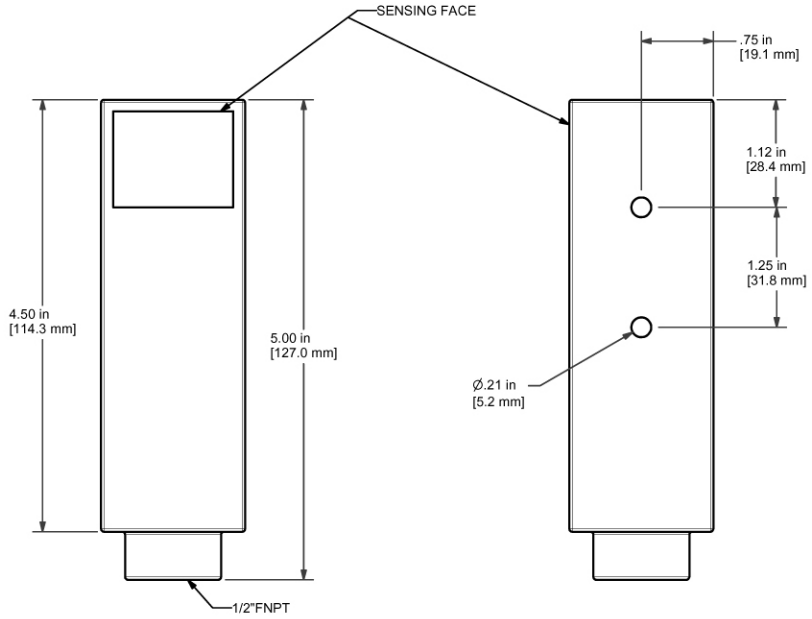

MODEL NO.

11-51524-A2

PRODUCT LINE

GO Switch Leverless Limit Switches

SPECIFICATIONS

Model	GO Switch Model 11- 1-1/2" square x 4-9/16" overall
Contact Form	DMDB, two-circuit, Form Z contacts; 10A/120VAC, 3A/24VDC
Sensing Range	Standard sensing - approx. 10mm (3/8") side sensing
Outlet Position	1/2" NPT conduit outlet on bottom of enclosure
Enclosure Material	Stainless steel
Approvals	CSA / FM explosion proof - Cl I, Div 1; Grps A-D; Cl II, Div 1, Grps E-G; Cl III; (Lead seal req'd within 18")
Wiring Options	PVC Lead Wires - 18 gauge - 914mm (36")
Temperature Rating	-40 °C to 105 °C

DMDB Form Z PVC Leads	
PVC Leads	
N/C 1 & 2	Red & Red/White Stripe
N/O 1 & 2	Blue & Blue/White Stripe

Termination A
S-K025 Rev. 4, 0406-5M

Current as of Dec 5, 2012 - subject to change without notice.

TOPWORX
TopWorx, Inc.
3300 Fern Valley Rd.
Louisville, KY 40213
(502) 969-8000 ph.
(502) 969-5911 fax
www.topworx.com