



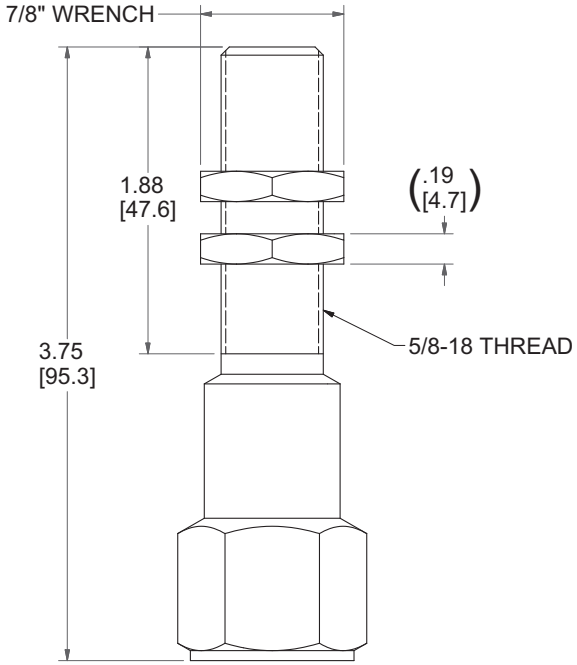

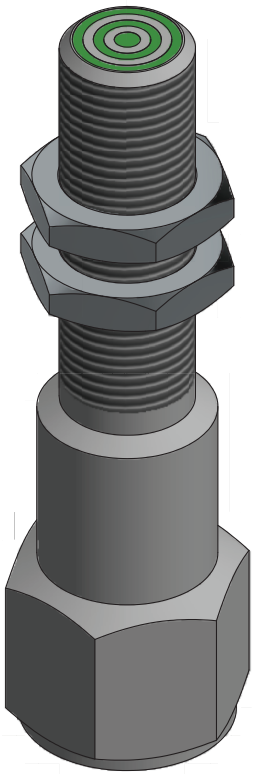

MODEL NUMBER

73-1356T-A4


PRODUCT LINE

GO™ Switch 70 Series Hex Head

SPECIFICATIONS

Model	73 Model
Contact Form	SPDT
Sensing Range	Approx. 0.1" end sensing (Rated 2,000 psi)
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	ATEX/IECEx Zone 1, Exdb, Hermetically Sealed
Wiring Option	PVC leads, 12ft
Regional Certification	No Regional Certification
Custom Field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

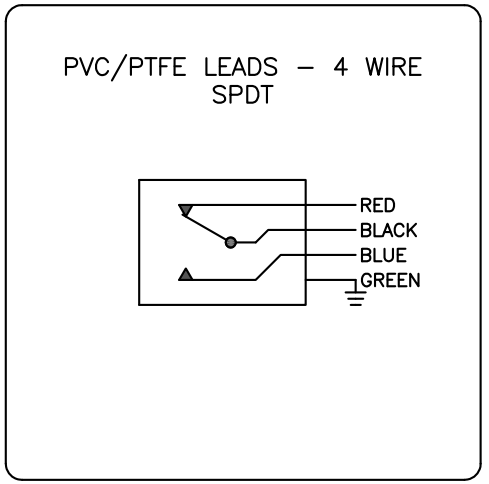

Current as of May 16, 2022 – Subject to change without notice.

NAMEPLATE

Ex db IIC T6 Gb
Ex tb IIIC T85°C Db
-40°C≤ Ta ≤ 50°C; IP66
120VAC/4A; 24VDC/3A Resistive
Conduit: 1/2 NPT - Hermetically Sealed
Baseefa 08ATEX0360X IECEx BAS 08.0122X

2813 II 2 GD

TOPWORX™
3300 Fern Valley Road
Louisville, KY 40213
(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com