



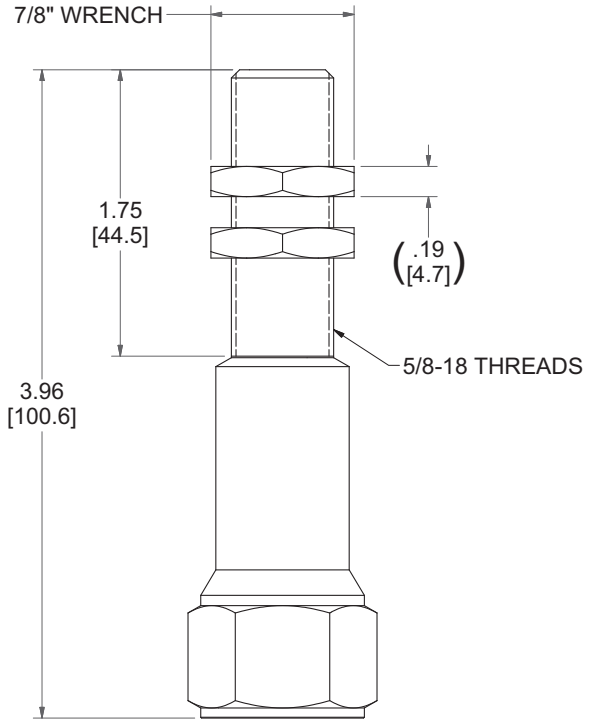

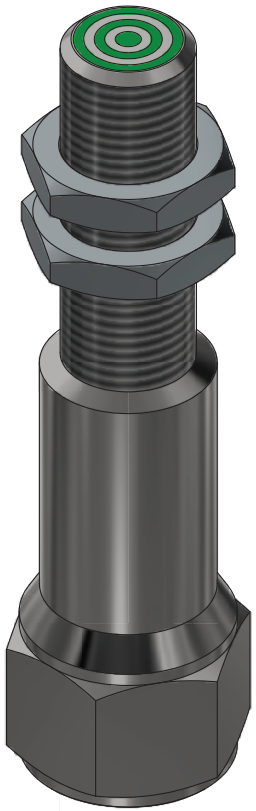

MODEL NUMBER

7G-13563-A3

PRODUCT LINE


GO™ Switch 70 Series Hex Head

SPECIFICATIONS

Model	7G Model
Contact Form	SPDT
Sensing Range	Approx. 0.1" end sensing (Rated 2,000 psi)
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	UL Cl I, Div 1
Wiring Option	PVC leads, 6ft
Regional Certification	No Regional Certification
Custom Field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

PVC/PTFE LEADS – 4 WIRE
SPDT



NAMEPLATE

Ind. Cont. Eq. for Hazardous Locations
Class I, Division 1, Groups A,B,C,D; Type 4X
Class II, Division 1, Groups E,F,G; Class III
120VAC/4A; 24VDC/3A Resistive
Conduit: 1/2 NPT - Hermetically Sealed

Current as of June 2, 2022 – Subject to change without notice.

TOPWORX™
3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com