




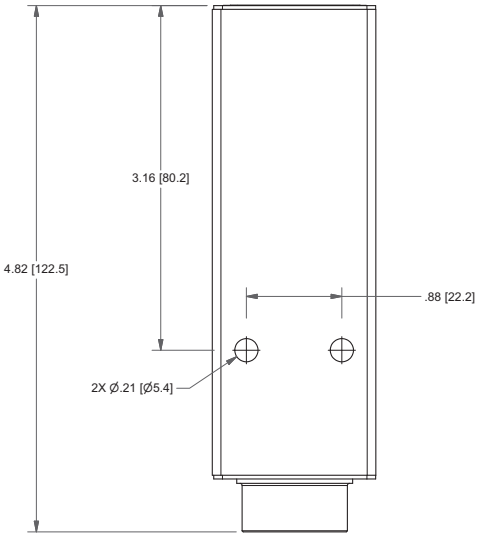

MODEL NUMBER

81-20524-A3


PRODUCT LINE

GO™ Switch Model 81

SPECIFICATIONS

Model	81 Model
Contact Form	DPDT (Form CC)
Sensing Range	Approx. 1/4" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel Enclosure
Area Classification	CSA/FM Cl 1, Div 1
Wiring Options	6ft PVC lead wires
Regional Certification	no regional certification
Custom field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

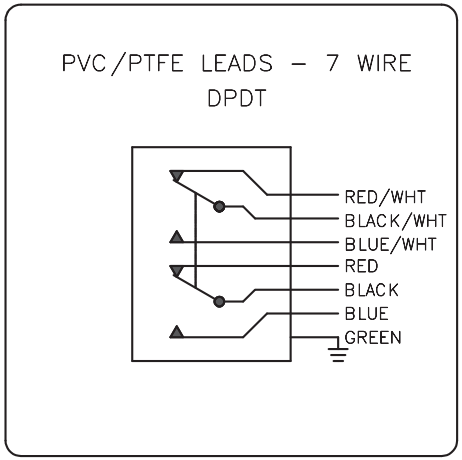

Current as of October 14, 2022 – Subject to change without notice.

NAMEPLATE

GO SWITCH
Louisville, KY 40213
www.topworx.com

COUNTRY OF ORIGIN US

CL I DIV 1, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G; CL III;
INDUSTRIAL CONTROL EQUIPMENT FOR HAZARDOUS LOCATIONS
ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE; 600VAC MAX
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.

Model #:

Serial #:

GO SWITCH

TOPWORX™
3300 Fern Valley Road
Louisville, KY 40213

(502)969-8000 PH
(502)969-5911 FAX
www.topworx.com